


Descriptions

Polaris' PFRM-1-50 series is a Single Channel OCXO Module that provides a highly stable 50 MHz sine wave outputs. The OCXO with excellent performance, housed into this series provides a temperature stability from ± 25 ppb to ± 50 ppb over operating temperature range and aging of ± 100 ppb per year at 25°C. Also this series offers excellent phase noise performance of -165 dBc/Hz @10 KHz offset from 50 MHz Output.

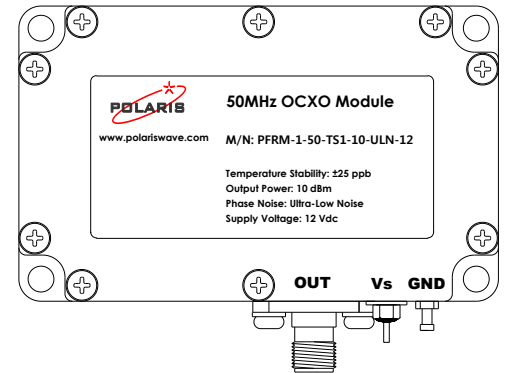

Features

- ❖ 50 MHz Output Frequency
- ❖ Sine Wave Output
- ❖ Built in OCXO with Excellent Performance
- ❖ Various Options Available
- ❖ Affordable Price
- ❖ Internal Voltage Regulators

Applications

- ❖ Military Electronic Systems
- ❖ SATCOM
- ❖ Frequency Reference Generation
- ❖ Phase Noise Measurements
- ❖ Telecommunications Standards

Ordering Information

❖ PFRM-1-50-TS-OP-PN-SV

- **TS**: Frequency Stability vs. Temperature (ppb)
 - . TS1, TS2, or TS3: See "Note 1"
- **OP**: Output Power (dBm)
 - . 0 to 9 in 1 steps: See "Note 2"
- **PN**: Phase Noise (dBc/Hz)
 - . LN or ULN: See "Note 3"
- **SV**: Supply Voltage (Vdc)
 - . 12 to 15: See "Note 4"

❖ Example

- PFRM-1-50-TS1-05-ULN-12
 - . Frequency Stability vs. Temperature: ± 25 ppb over -40 °C to 75 °C
 - . Output Power: 5 dBm
 - . Phase Noise: Ultra-Low Noise (See "Note 3")
 - . Supply Voltage: 12 Vdc

Specifications for Standard Model

Parameter		Unit	Min.	Typ.	Max.	Remarks
Frequency Calibration		ppm	-0.1		+0.1	
Frequency Stability	vs. Temperature (Note 1)	ppb	TS1 (See "Note 1")			See "Ordering Information"
	Vs. Aging	Daily	ppb	-3	+3	
		1st year	ppb	-100		+100
Output	Frequency	MHz	50			
	Power (Note 2)	dBm	5	7		See "Ordering Information"
	Harmonics	dBc			-30	
	Spurious	dBc			-70	
	Load Impedance	Ohm	50			
Phase Noise (Note 3)		dBc/Hz	ULN (See "Note 3")			See "Ordering Information"
Supply Voltage (Note 4)		Vdc	12		15	See "Ordering Information"
Current Consumption		mA			150	Steady State
					350	Warm-up
Warm Up Time		min		3	5	
Operating Temperature			TS1 (See "Note 1")			
Storage Temperature			-40 °C to 85 °C			
Enclosure (L x W x H)		mm	65.0 x 40.0 x 23.5			

Note 1

Option	Unit	Value	Condition	Remarks
TS1	ppb	±25	-40 °C to 75 °C	
TS2	ppb	±25	-20 °C to 70 °C	
TS3	ppb	±50	-10 °C to 60 °C	


Note 2 Available order from 0 dBm (Typ.) to 9 dBm (Typ.) in 1dB steps.

Note 3

Option	Frequency Offset	Unit	Min.	Typ.	Max.	Remarks
LN (Low Noise)	100Hz offset	dBc/Hz		-115	-110	
	1KHz offset	dBc/Hz		-135	-130	
	10KHz offset	dBc/Hz		-145	-140	
	100KHz offset	dBc/Hz		-155	-150	
	1MHz offset	dBc/Hz		-155	-150	
ULN (Ultra-Low Noise)	100Hz offset	dBc/Hz		-135	-130	
	1KHz offset	dBc/Hz		-155	-150	
	10KHz offset	dBc/Hz		-165	-160	
	100KHz offset	dBc/Hz		-170	-165	
	1MHz offset	dBc/Hz		-170	-165	

Note 4 Consult factory for ordering other Supply Voltage.

Enclosure Drawings

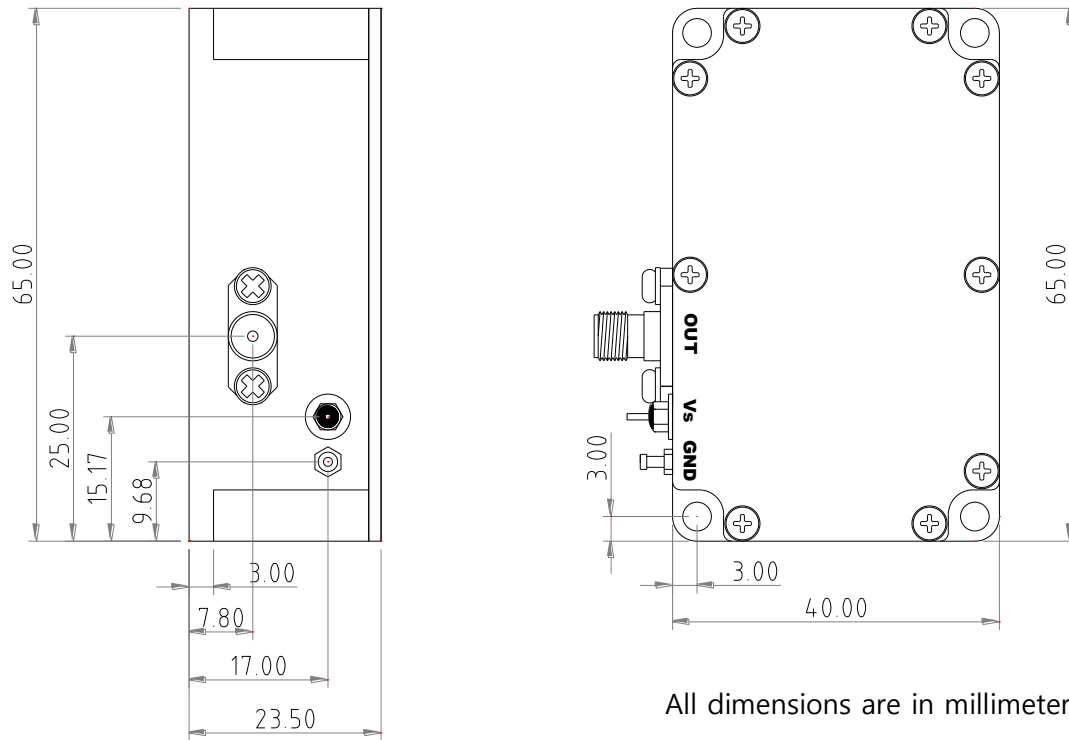

Symbol	Connector	Description
OUT	SMA-Jack, 50 ohm	RF Output (50 MHz)
Vs	EMI Feed-thru	Supply Voltage (+12 V)
GND	Turret Thread Terminal	Ground

- Address: #1913, Anam tower, 311, Teheran-ro, Gangnam-gu, Seoul, Republic of Korea
- Tel: +82-2-2009-2120
- e-mail: info@polariswave.com
- web: www.polariswave.com